

PRODUCT INFORMATION AND SPECIFICATION SHEET

WALL OUTLETS - 144 MM







WALL OUTLETS – 144 MM || PRODUCT INFORMATION

DESCRIPTION

Meljac's 144 mm surface mounted wall outlet assembly can accommodate three power receptacles or low-voltage ports. The specified components are included with the plate assembly.

Made in France.

PERSONALIZED PLATE DETAILS

FINISHES

Cover plates are made-to-order in any of the finishes included in the <u>Meljac Finish Catalog</u>. Meljac offers over 30 finishes in materials including chrome, copper, gunmetal, nickel. brass and bronze.

Powdercoating is available in any specification from the RAL Color Chart.

Custom-matched finish options are also available, dependent upon project size and finish details.

RECEPTACLE AND PORT OPTIONS

- 15A 125VAC TR Receptacle (Black or White)
- 20A 125VAC TR Receptacle (Black or White)
- USB-A Charging Port (2.1A 5VDC)
- RJ45 Data Receptacle (Cat6)
- RJ11 Phone Jack Receptacle
- Speaker Binding Posts
- F Connector Cable Receptacle
- Cable pass-through

Please contact Meljac North America for any specialized port requests or questions.

EDGE TYPE

- Visible Torx HeadVisible Slot Head
- Beveled
 Straight

- Hidden
 - den

No coversSingle cover

Dual covers

RECEPTACLE COVERS

GFI/GFCI LOCATIONS

Meljac does not offer a GFI receptacle. To satisfy code in locations like kitchens or bathrooms, our standard 15A or 20A receptacles can be used with a GFCI breaker at the electrical panel or by using an inline GFI device.

BACK BOX

MELUS14482 - Required metal back box.

See Plate Size & Back Box Guide for more information.

Proprietary Meljac back boxes are stocked and available for immediate purchase from Meljac North America.

Note: back boxes must be installed at a level position to prevent a crooked plate installation.

CERTIFICATION

Conforms to UL 514A and CSA22.2 18 IP20



CARE / CLEANING INSTRUCTIONS


To protect the integrity of the finish, no chemicals or cleaning solutions should ever be used. Dry dust rags or microfiber cloths only.



WALL OUTLETS – 144 MM || DIMENSIONAL DRAWINGS

DIMENSIONS & DRAWINGS

Measurements: mm (inches)

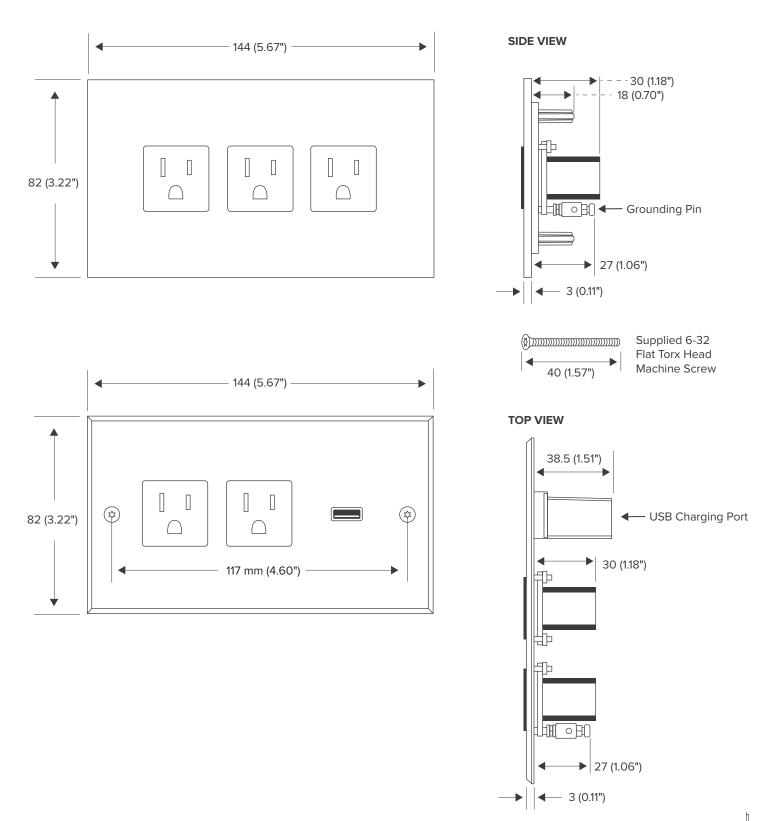




WALL OUTLETS – 144 MM || MOUNTING DRAWINGS

BACK BOX

MELUS14482

Please see our <u>Plate Size and Back Box Guide</u> for more information.

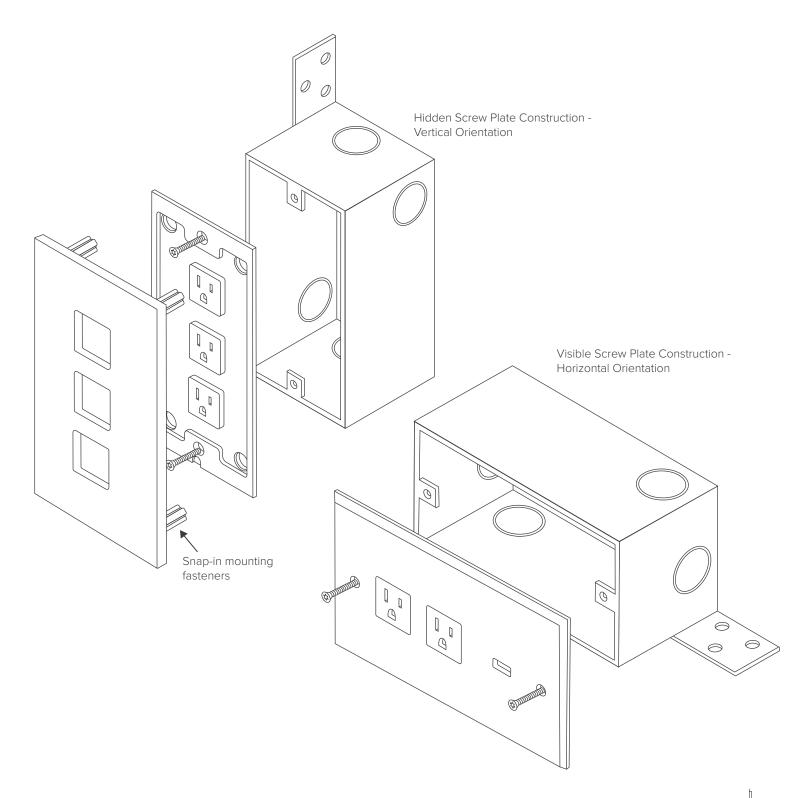



WALL OUTLETS – 144 MM || SPECIFICATION SHEET

PROJECT NAME: SPECIFIER: PLATE FINISH: SCREW TYPE Select one Visible - Torx Head Visible - Slot Head Hidden	PLATE ORIENTATION Select one Uertical Horizontal	EDGE TYPE Select one Beveled Straight	BACK BOX Meljac MELUS14482 (metal / new construction)
RECEPTACLES AND PORTS Mark "1" for port space one; mark "2" for port space two, mark "3" for port space three. 15A 125 VAC TR Receptacle - Black USB-A Charging Port (2.1A 5VDC) Speaker Binding Posts 15A 125 VAC TR Receptacle - White RJ45 Data Receptacle (Cat6) HDMI Port 20A 125 VAC TR Receptacle - Black RJ11 Phone Jack Receptacle Cable Pass-Thru 20A 125 VAC TR Receptacle - White F Connector Cable Receptacle Lable Pass-Thru			
CONFIGURATIONS Select	one	PORT PORT 1 2 Horizontal - Single Cove	r
PORT 1 PORT 2 PORT 3 Vertical - No Cover	Note: if an alternate configura contact Meljac North America		